




## Bar Arm Clamps

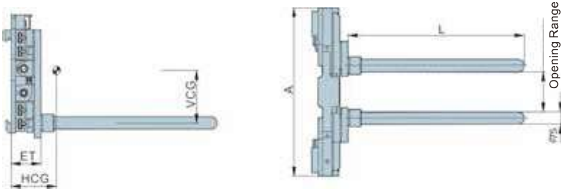

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width A	Bar Arm Diameter C	Bar Arm Length L	Vertical Center of Gravity VCG	Horizontal Center of Gravity HCG	Effective Thickness ET	Weight	Available Forklift
(Kg@mm)			(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)	(t)
1600@600	<b>YG16G-A1</b>	II	246-1400	1040	φ75	1500	218	241	165	400	1-2.5t
2300@600	<b>YG23G-B1</b>	III	240-1400	1010	φ75	1065	213	239	179	460	3-4.5t

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width A	Bar Arm Diameter C	Bar Arm Length L	Vertical Center of Gravity VCG	Horizontal Center of Gravity HCG	Effective Thickness ET	Weight	Available Forklift
(lbs@in)										(lbs)	(t)
3500@23.6"	<b>YG16G-A1</b>	II	9.7"-55.1"	40.9"	φ 2.95"	59.1"	8.6"	9.5"	6.5"	882	1-2.5t
5070@23.6"	<b>YG23G-B1</b>	III	9.4"-55.1"	39.8"	φ 2.95"	41.9"	8.4"	9.4"	7"	1014	3-4.5t

Notes: 1. Please gain the actual overall carrying capacity of forklift trucks/attachments from the forklift truck manufacturers.  
2. Forklift truck needs to add two groups of additional oil lines so as to match the attachments.

Model	Pressure Value Bar			Flow Value L/min			
	Max.	Sideshift action		Min.	Clamping action		
		Min.	Recommend		Max.	Min.	Recommend
<b>YG16G</b>	160	4	15	26	15	26	26
<b>YG23G</b>	160	4	23	38	15	38	38

### Configuration of Key Parts of Truck Attachments

- Hydraulic system: all key hydraulic components adopt originally imported hydraulic products; all the seals adopt imported products; and the high-pressure rubber hoses adopt cone sealed high-performance imported rubber hoses.
- Mechanical performance: it's equipped with sideshifting functions inside, which can realize the clamping/opening and sideshifting functions simultaneously with good view; and it can meet the use requirements by adding two groups of oil lines.
- Applicable scope: it's applied to the fork-taking, stacking and handling of drum-shaped cargoes.



Drum clamp can handle one, two or four drums during transportation, ensure the safe and reliable clamping and improve the handing efficiency. Widely used in the bottled cargo stacking operations, such as oil, petrochemical and food industries, etc.