


Block Clamps

Block Clamps

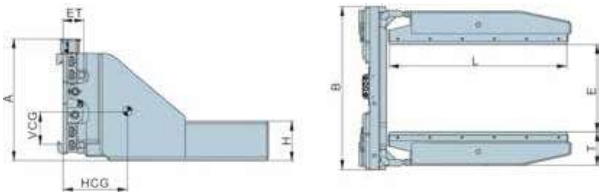

Model	Pressure Value Bar		Flow Value L/min			
	Max.	Min. Recommend	Max.	Min. Recommend	Max.	Max.
ZK**G	160	4	23	38	15	38

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width B (mm)	Frame Height A (mm)	Arm Height H (mm)	Arm Length L (mm)	Arm Thickness T (mm)	Weight (kg)	Hook spacing (mm)	Effective Thickness ET (mm)	Vertical Center of Gravity VCG (mm)	Horizontal Center of Gravity HCG (mm)	Available Forklift (t)
2700@500	ZK27G-A1	II	310-1625	1010	745	234	1100	202	760	950	132	171	361	1-2.5t
2700@500	ZK27G-B1	III	330-1645	1010	745	234	1470	197	870	950	134	169	455	3-4.5t
2700@500	ZK27G-B2	III	310-1625	1010	745	234	1100	202	760	950	134	163	384	3-4.5t
2700@500	ZK27G-B3	III	320-1635	1010	745	124	1100	195	640	950	134	174	311	3-4.5t
2700@500	ZK27G-B6	III	320-1635	1010	745	238	1260	195	830	950	134	155	441	3-4.5t
1800@600	ZK15G-B1	III	350-1630	1010	745	200	1170	155	600	980	131	187	325	3-4.5t
2000@500	ZK20G-B1	III	425-1850	1265	745	190	1280	200	700	980	137	172	348	3-4.5t
1800@600	ZK15F-B1	III	290-1600	1100	745	160	1230	191	680	970	132	139	339	3-4.5t

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width B (mm)	Frame Height A (mm)	Arm Height H (mm)	Arm Length L (mm)	Arm Thickness T (mm)	Weight (kg)	Hook spacing (mm)	Effective Thickness ET (mm)	Vertical Center of Gravity VCG (mm)	Horizontal Center of Gravity HCG (mm)	Available Forklift (t)
5950@20"	ZK27G-A1	II	12.2"-64"	39.8"	29.3"	9.2"	43.3"	8"	1675	37.4"	5.2"	6.7"	14.2"	1-2.5t
5950@20"	ZK27G-B1	III	13"-64.8"	39.8"	29.3"	9.2"	57.9"	7.8"	1948	37.4"	5.3"	6.7"	17.9"	3-4.5t
5950@20"	ZK27G-B2	III	12.2"-64"	39.8"	29.3"	9.2"	43.3"	8"	1675	37.4"	5.3"	6.4"	15.1"	3-4.5t
5950@20"	ZK27G-B3	III	12.6"-64.4"	39.8"	29.3"	4.9"	43.3"	7.7"	1411	37.4"	5.3"	6.9"	12.2"	3-4.5t
5950@20"	ZK27G-B6	III	12.6"-64.4"	39.8"	29.3"	9.4"	49.6"	7.7"	1830	37.4"	5.3"	6.1"	17.4"	3-4.5t
3950@23.6"	ZK15G-B1	III	13.8"-64.2"	39.8"	29.3"	7.9"	46.1"	6.1"	1323	38.6"	5.2"	7.4"	12.8"	3-4.5t
4400@20"	ZK20G-B1	III	16.7"-72.8"	49.8"	29.3"	7.5"	50.4"	7.9"	1543	38.6"	5.4"	6.8"	13.7"	3-4.5t
3950@23.6"	ZK15F-B1	III	11.4"-63"	43.3"	29.3"	6.3"	48.4"	7.5"	1499	38.6"	5.2"	5.5"	13."	3-4.5t

Notes: 1. Please gain the actual overall carrying capacity of forklift trucks/attachments from the forklift truck manufacturers.
2. Forklift truck needs to add two groups of additional oil lines so as to match the attachments.

Configuration of Key Parts of Truck Attachments

1. Hydraulic system: the load keeping valves of the main control valves adopt originally imported products; all the seals adopt imported products; and the high-pressure rubber hoses adopt cone sealed high-performance imported rubber hoses.
2. Structural part: the left and right clamping panels adopt high-performance alloy steel plates, and the connection plates are hot pressed by high-strength plates, which have good anti-deformation performance; the inside of clamp arms are equipped with replaceable high-wear-resistance rubber blocks.
3. Mechanical performance: its equipped with sideshifting functions inside, which can realize the clamping/opening and sideshifting functions simultaneously with good view; and it can meet the use requirements by adding two groups of oil lines.