


## Bucket Clip

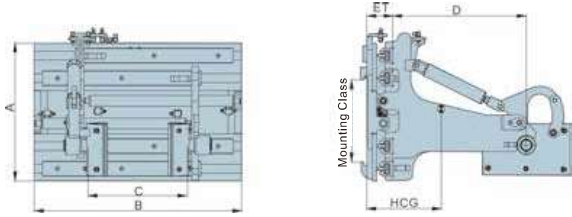

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Overall Height	Overall Width	Forward Rotation Angle	Weight	Effective Thickness	Horizontal Center of Gravity	Available Forklift
(Kg@mm)			(mm)	A (mm)	B (mm)	( ° )	(kg)	ET (mm)	HCG (mm)	(t)
300@630	<b>DT03G-A1</b>	II	432-1612	640	970	180	350	120	210	1-2.5t


Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Overall Height	Overall Width	Forward Rotation Angle	Weight	Effective Thickness	Horizontal Center of Gravity	Available Forklift
(lbs@in)			(mm)	A (mm)	B (mm)	( ° )	(lbs)	ET (mm)	HCG (mm)	(t)
660@24.8"	<b>DT03G-A1</b>	II	17"-63.5"	25.2"	38.2"	7.1"	772	4.7"	8.3"	1-2.5t

- Notes: 1. Please gain the actual overall carrying capacity of forklift trucks/attachments from the forklift truck manufacturers.  
 2. Forklift truck needs to add two groups of additional oil lines so as to match the attachments.

Model	Pressure Value Bar		Flow Value L/min				
	Max.	Min. Recommend.	Sideshift action		Clamping action		
			Max.	Min. Recommend.	Max.	Min. Recommend.	
<b>DT03G-A1</b>	160	4	7.5	11	19	26	38


### Configuration of Key Parts of Truck Attachments

1. Hydraulic system: all the seals adopt imported products; and the high-pressure rubber hoses adopt cone sealed high-performance imported rubber hoses.
2. Structural part: the guide rail assembly is welded by high-performance alloy steel plates, which has good anti-bending performance.
3. Mechanical performance: it has the tipping function, it can realize the clamping/opening and tipping actions simultaneously, which has better view; and it can meet the use requirements by adding two groups of oil lines.
4. Applicable scope: it's applied for the sites of forward tipping and emptying of cylindrical iron drum, oil drum, rubbish bin, etc..

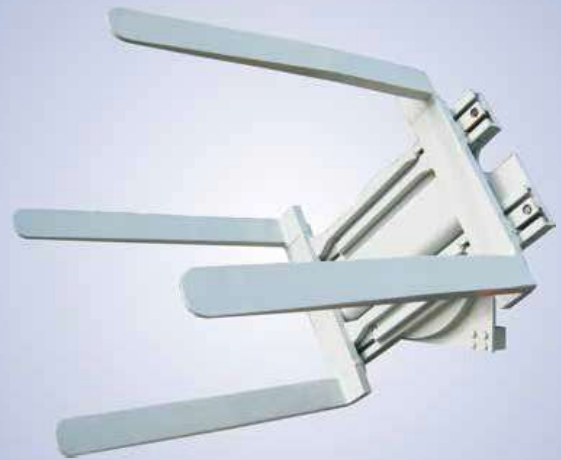

Equipped with gripper rotation and handling functions for loading, unloading and sorting of box and soft bale cargo.

## Turnloads

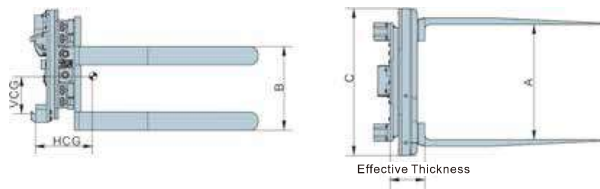

Capacity@ Load Center (Kg@mm)	Catalog Order No.	Mounting Class	Opening Range A (mm)	Tire Size (mm)	Tire Spacing B (mm)	Effective Thickness ET (mm)	Vertical Center of Gravity VCG (mm)	Horizontal Center of Gravity HCG (mm)	Weight (kg)	Available Forklift (t)
1000@685	<b>XC10G-A1</b>	II	390-1390	45x150x1370	800	313	328	386	875	2-2.5t
1500@610	<b>XC15G-B1</b>	III	1020-2330	45x125x1220	940	307	335	288	875	3-4.5t
2300@610	<b>XC23G-B1</b>	III	710-2020	45x125x1220	575	313	295	297	825	3-4.5t


Capacity@ Load Center (lbs@in)	Catalog Order No.	Mounting Class	Opening Range A	Tire Size	Tire Spacing B	Effective Thickness ET	Vertical Center of Gravity VCG	Horizontal Center of Gravity HCG	Weight (lbs)	Available Forklift (t)
2200@27"	<b>XC10G-A1</b>	II	15.4"-54.7"	1.8"x5.9"x53.9"	31.5"	12.3"	12.9"	15.2"	1929	2-2.5t
3300@24"	<b>XC15G-B1</b>	III	40.2"-91.7"	1.8"x4.9"x48"	37"	12.1"	13.2"	11.3"	1929	3-4.5t
5070@24"	<b>XC23G-B1</b>	III	28"-79.5"	1.8"x4.9"x48"	22.6"	12.3"	11.6"	11.7"	1819	3-4.5t

- Notes: 1. Please gain the actual overall carrying capacity of forklift trucks/attachments from the forklift truck manufacturers.  
2. Forklift truck needs to add two groups of additional oil lines so as to match the attachments.

Model	Pressure Value Bar			Flow Value L/min			
	Rotating action			Clamping action			
	Max.	Min.	Recommend Max.	Min.	Recommend Max.	Max.	
<b>XC**G</b>	160	19	38	57	26	38	40

### Configuration of Key Parts of Truck Attachments

1. Hydraulic system: all motors and other key hydraulic components adopt originally imported hydraulic products; all the seals adopt imported products; and the high-pressure rubber hoses adopt cone sealed high-performance imported rubber hoses.
2. Structural part: it adopts large-modulus slewing bearing, which has stronger bearing capacity. The turbine and worm adopts involute gears, so as to not only increase the efficiency and decrease the heat loss, but also realized the self-locking function.
3. Mechanical performance: it can realize the 360° rotation, and it adopts two-way hydraulic locks for rotating oil lines so as to realize two-way self-locking and ensure the safety at work. And it adds hydraulic control check valve for each oil cylinder to realize holding pressure for a long time.
4. Applicable scope: it has the clamp rotating and handling functions, which can be used in the handling and sorting operations of carton and bale cargoes.

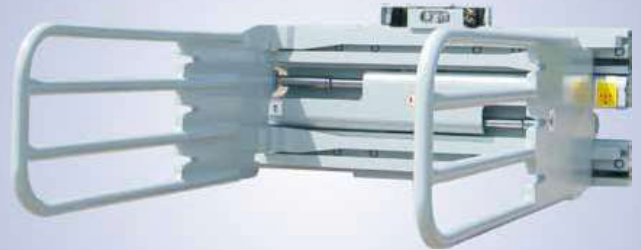

Sponge rubber clip can efficiently and safely handle and stack any type of foam products including rubber, chemical industry and chemical fiber, etc.