


Sponge Rubber Clip

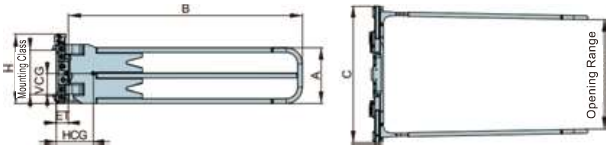

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width	Arm Height	Arm Length	Overall Height	Effective Thickness	Vertical Center of Gravity	Horizontal Center of Gravity	Weight	Available Forklift
(Kg@mm)			(mm)	(mm)	A (mm)	B (mm)	H (mm)	ET (mm)	VCG (mm)	HCG (mm)	(kg)	(t)
500@1000	HX05G-B1	III	1270-3120	1680	600	1825	750	134	244	429	890	3-4.5t
1500@500	HX15G-B2	III	650-2510	1680	600	1825	750	134	242	410	800	3-4.5t
2200@500	HX22G-B1	III	740-2590	1680	600	2525	750	134	242	546	880	3.5-4.5t
1000@1000	HX10G-B1	III	730-2580	1680	600	2825	750	134	242	619	910	3-4.5t
1000@500	HX10G-B2	III	885-2310	1100	600	1505	738	134	251	369	740	3-4.5t


Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width	Arm Height	Arm Length	Overall Height	Effective Thickness	Vertical Center of Gravity	Horizontal Center of Gravity	Weight	Available Forklift
(lbs@in)					A	B	H	ET	VCG	HCG	(lbs)	(t)
1100@39.4"	HX05G-B1	III	50"-122.8"	66.1"	23.6"	71.9"	29.5"	5.3"	9.6"	16.9"	1962	3-4.5t
3300@19.7"	HX15G-B2	III	25.6"-98.8"	66.1"	23.6"	71.9"	29.5"	5.3"	9.5"	16.1"	1764	3-4.5t
4850@19.7"	HX22G-B1	III	29.1"-102"	66.1"	23.6"	99.4"	29.5"	5.3"	9.5"	21.5"	1940	3.5-4.5t
2200@39.4"	HX10G-B1	III	28.7"-101.6"	66.1"	23.6"	111.2"	29.5"	5.3"	9.5"	24.4"	2006	3-4.5t
2200@19.7"	HX10G-B2	III	34.8"-90.9"	43.3"	23.6"	59.3"	29.1"	5.3"	9.9"	14.5"	1631	3-4.5t

- Notes: 1. Please gain the actual overall carrying capacity of forklift trucks/attachments from the forklift truck manufacturers.
2. Forklift truck needs to add two groups of additional oil lines so as to match the attachments.

Model	Pressure Value Bar		Flow Value L/min	
	Max.	Min. Reomax	Max.	Min. Reomax
HX**G	160	4	23	38


Configuration of Key Parts of Truck Attachments

1. Hydraulic system: the load keeping valves of the main control valves adopt originally imported products; all the seals adopt imported products, and the high-pressure rubber hoses adopt cone sealed high-performance imported rubber hoses.
2. Structural part: the guide rail assembly is welded by high-performance alloy steel plates, which has good anti-bending performance.
3. Mechanical performance: its equipped with sideshifting function inside, which can realize the clamping/opening and sideshifting functions simultaneously with good view; and it can meet the use requirements by adding two groups of oil lines.
4. Applicable scope: it's applied to the handling and stacking operations of compressed sponge and rubber.

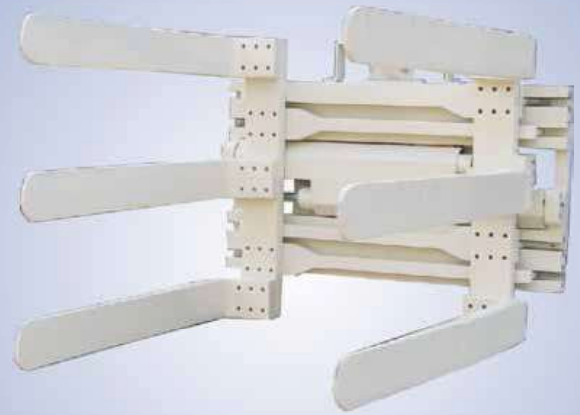

The waste paper clamp is used in the waste paper packaging industry, which can move waste paper boxes and waste paper quickly and effectively.

Waste Paper Clamps

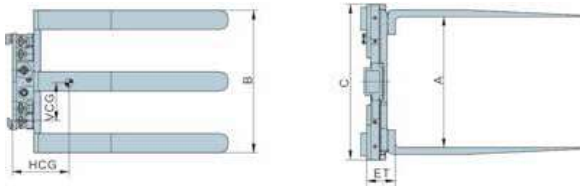

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width	Tire Size	Tire Spacing	Effective Thickness	Vertical Center of Gravity	Horizontal Center of Gravity	Weight	Available Forklift
(Kg@mm)			(mm)	(mm)	(mm)	(mm)	(mm)	VCG (mm)	HCG (mm)	(kg)	(t)
2700@500	FC30G-B1	III	710-2020	1010	45x125x1220	925	183	310	302	655	3-4.5t

Capacity@ Load Center	Catalog Order No.	Mounting Class	Opening Range	Frame Width	Tire Size	Tire Spacing	Effective Thickness	Vertical Center of Gravity	Horizontal Center of Gravity	Weight	Available Forklift
(lbs@in)			A	C		B	ET	VCG	HCG	(lbs)	(t)
5950@19.7"	FC30G-B1	III	28"-79.5"	39.8"	1.8"x4.9"x48"x36.4"	7.2"	7.2"	12.2"	11.9"	1444	3-4.5t

- Notes: 1. Please gain the actual overall carrying capacity of forklift trucks/attachments from the forklift truck manufacturers.
2. Forklift truck needs to add two groups of additional oil lines so as to match the attachments.

Model	Pressure Value Bar			Flow Value L/min			
	Sideshift action		Clamping action		Max.		
	Max.	Min. Recommended	Max.	Min. Recommended			
FC**G	160	4	23	40	15	38	40

Configuration of Key Parts of Truck Attachments

1. Hydraulic system: the load keeping valves of the main control valves adopt originally imported products; all the seals adopt imported products; and the high-pressure rubber hoses adopt cone sealed high-performance rubber hoses.
2. Structural part: the clamp arms adopt alloy steel castings, and the guide rail assembly is welded by high-performance alloy steel plates, which has good anti-bending performance.
3. Mechanical performance: it's equipped with sideshifting function inside, which can realize the clamping/opening and sideshifting actions simultaneously with good view; and it can meet the use requirements by adding two groups of oil lines.
4. Applicable scope: it has the clamping and handling functions, and it's applied to the handling and sorting operations of waste paper, carton and bale cargoes.

HELI Single Double Pallets Handlers



Single double pallets handlers flexible application of single or double pallets hanging. Be widely used for handling and stacking operations in food and beverage industry, import and export trade and bulking goods industry. Particularly apply to handle and stack palletized goods in container truck.